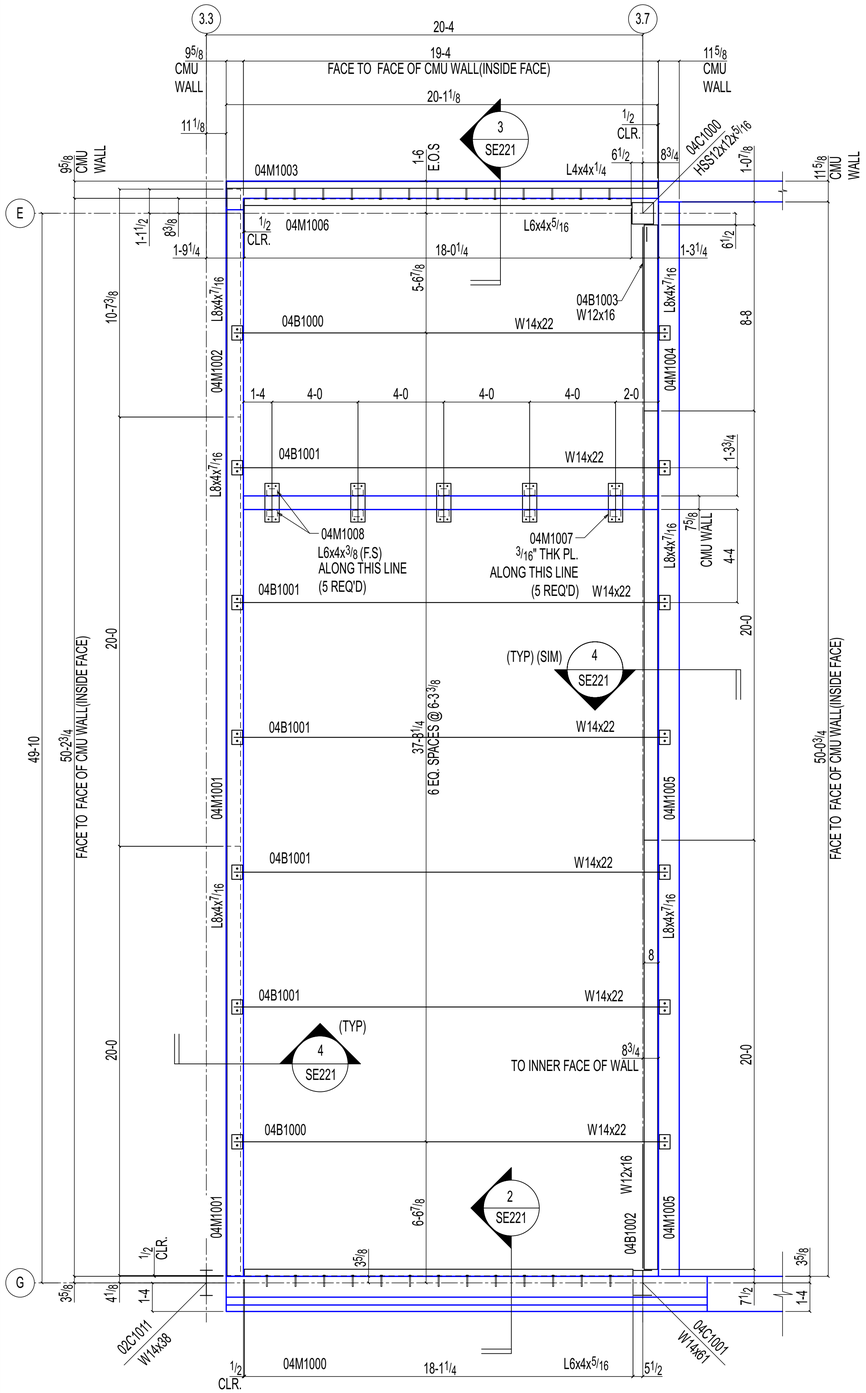

1 / E203

CONCRETE LID FRAMING PLAN (SEQ#04)

(REF: 1/S102,1/A102)

1. TOP OF CONCRETE LID FLOOR SLAB ELEVATION = 13'-0 (U.N.O).
2. TOP OF LID BEAM ELEVATION = 12'-8"(U.N.O). ALL ELEVATION ARE REFERENCED FROM THE FINISHED FLOOR EL: [0'-0"] = DATUM EL: 100'-0" (U.N.O).
3. ALL FIELD BOLTS SHALL BE 3/4" Ø F1852N TC BOLTS.(U.N.O).
4. (1) -DENOTES 1"Ø F2280N TC BOLTS.
5. SEE SHEET SE228 FOR CMU WALL BRACING TYPICAL SECTION

TRUE NORTH PROJECT NORTH

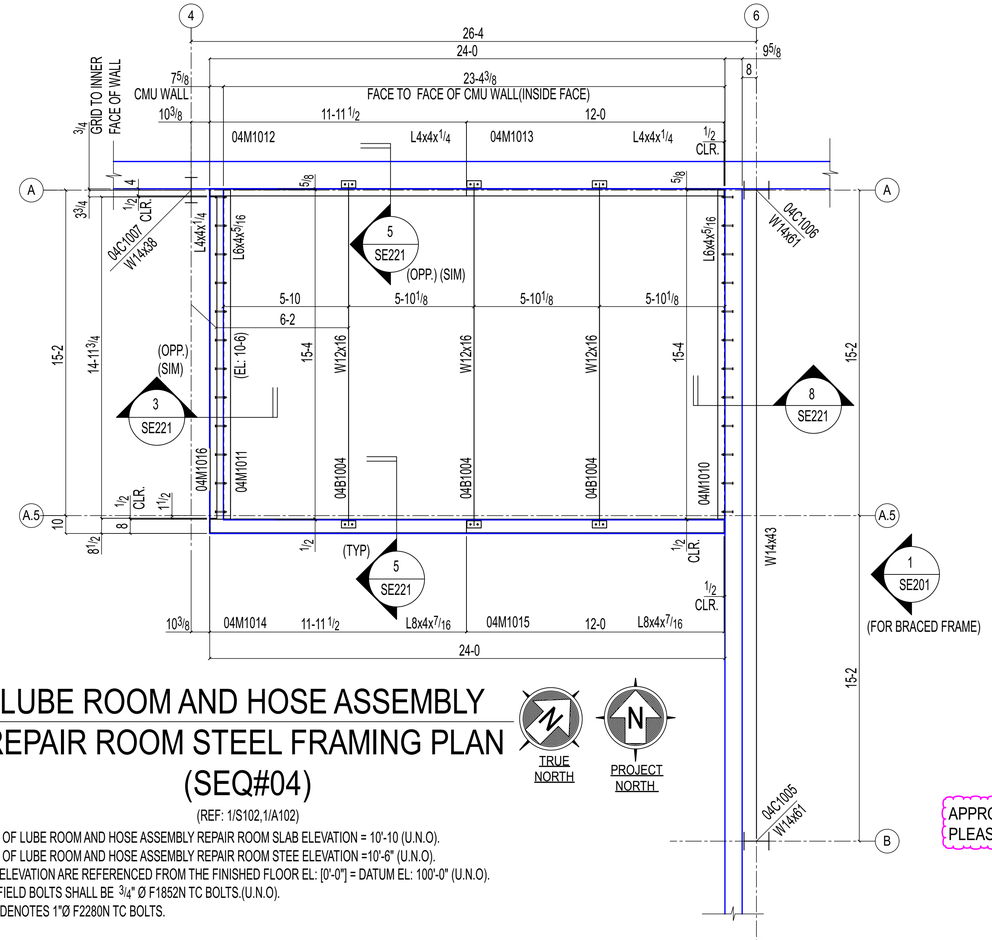

2 / E203

LUBE ROOM AND HOSE ASSEMBLY REPAIR ROOM STEEL FRAMING PLAN (SEQ#04)

(REF: 1/S102,1/A102)

1. TOP OF LUBE ROOM AND HOSE ASSEMBLY REPAIR ROOM SLAB ELEVATION = 10'-10 (U.N.O).
2. TOP OF LUBE ROOM AND HOSE ASSEMBLY REPAIR ROOM STEE ELEVATION =10'-6" (U.N.O). ALL ELEVATION ARE REFERENCED FROM THE FINISHED FLOOR EL: [0'-0"] = DATUM EL: 100'-0" (U.N.O).
3. ALL FIELD BOLTS SHALL BE 3/4" Ø F1852N TC BOLTS.(U.N.O).
4. (1) -DENOTES 1"Ø F2280N TC BOLTS.

TRUE NORTH PROJECT NORTH

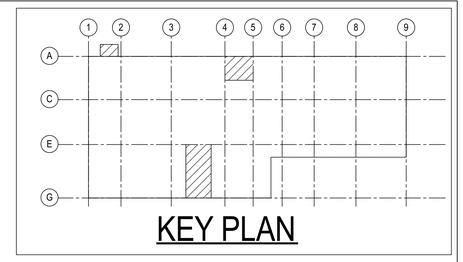

APPROVER
PLEASE CONFIRM ALL STEEL IN THIS SHEET WILL BE SHOP PRIMED.

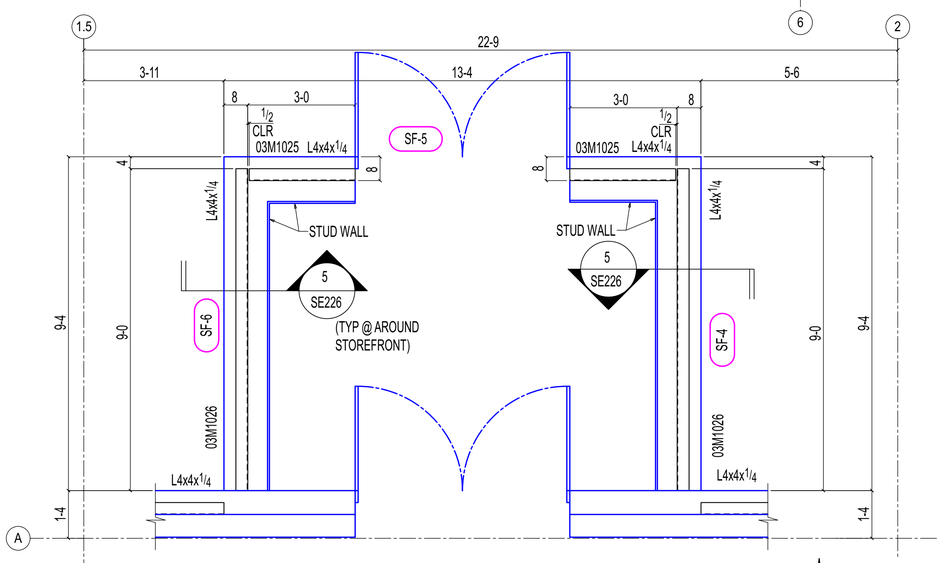

3 / E203

STOREFRONT MISC PLAN (SEQ#03)

(REF: 4/S400,1/A171,3/A421)

NOTE:
1. (SF-X) DENOTES STOREFRONT.

TRUE NORTH PROJECT NORTH

REVISIONS

REV#	DWN BY	DESCRIPTION	DATE
A	SRP	ISSUED FOR APPROVAL	Jun 11 2025

THE INFORMATION NOTED HEREON THIS DRAWING IS THE PROPERTY OF STEEL FAB ENTERPRISES, INC. AND SHALL NOTED BE USED WITHOUT WRITTEN CONSENT.

STEEL FAB ENTERPRISES, LLC
AISC CERTIFIED FABRICATOR AND ERECTOR
MISCELLANEOUS METALS FABRICATOR AND ERECTORS
623 BAUMGARDNER ROAD, LANCASTER, PA 17603
TEL. (717)464-0330 FAX (717)464-9464
WWW.STEELFABENTERPRISES.COM

PROJECT OWNER : CK CAPITAL, LLC
PROJECT DESCRIPTION : CLEVELAND BROTHERS-MILESBURG
PROJECT ADDRESS : 4025N. EAGLE VALLEY ROAD, HOWARD, PA 16841
CONTRACTOR : KINSLEY CONSTRUCTION, INC.

DRAWN BY : BAS	DATE : 5-20-25	PROJ. NO. :	25012	REV # A
CHECKED BY : SRP	DATE : 5-20-25	DWG NO. :	E203	

DWG DESCRIPTION : LID & LUBE ROOM FRAMING PLAN