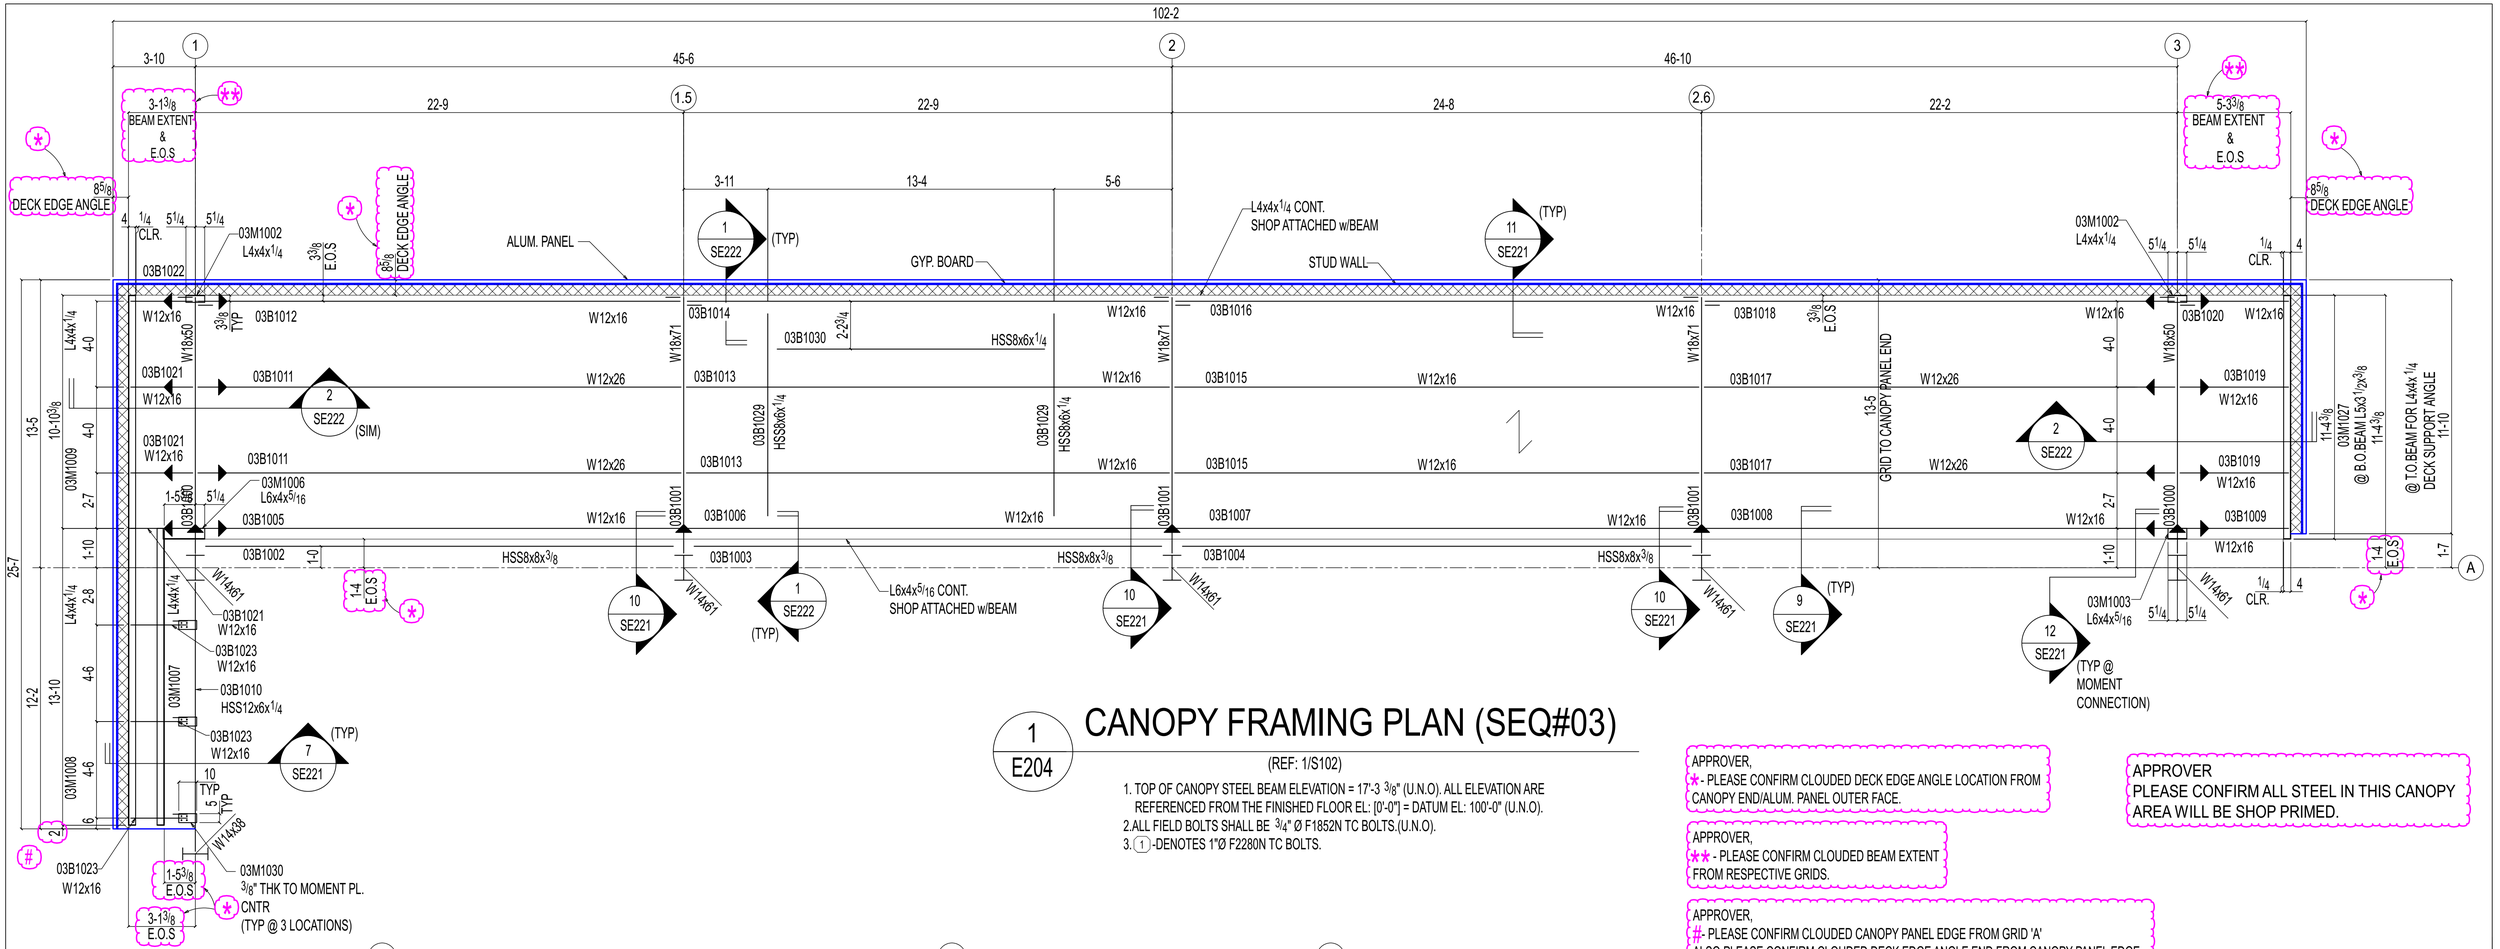

1 / E204 CANOPY FRAMING PLAN (SEQ#03)

(REF: 1/S102)

1. TOP OF CANOPY STEEL BEAM ELEVATION = 17'-3 3/8" (U.N.O). ALL ELEVATION ARE REFERENCED FROM THE FINISHED FLOOR EL: [0'-0"] = DATUM EL: 100'-0" (U.N.O).
2. ALL FIELD BOLTS SHALL BE 3/4" Ø F1852N TC BOLTS.(U.N.O).
3. (1) -DENOTES 1"Ø F2280N TC BOLTS.

APPROVER,
* - PLEASE CONFIRM CLOUDED DECK EDGE ANGLE LOCATION FROM CANOPY END/ALUM. PANEL OUTER FACE.

APPROVER,
** - PLEASE CONFIRM CLOUDED BEAM EXTENT FROM RESPECTIVE GRIDS.

APPROVER,
- PLEASE CONFIRM CLOUDED CANOPY PANEL EDGE FROM GRID 'A'
ALSO PLEASE CONFIRM CLOUDED DECK EDGE ANGLE END FROM CANOPY PANEL EDGE.

APPROVER
PLEASE CONFIRM ALL STEEL IN THIS CANOPY AREA WILL BE SHOP PRIMED.

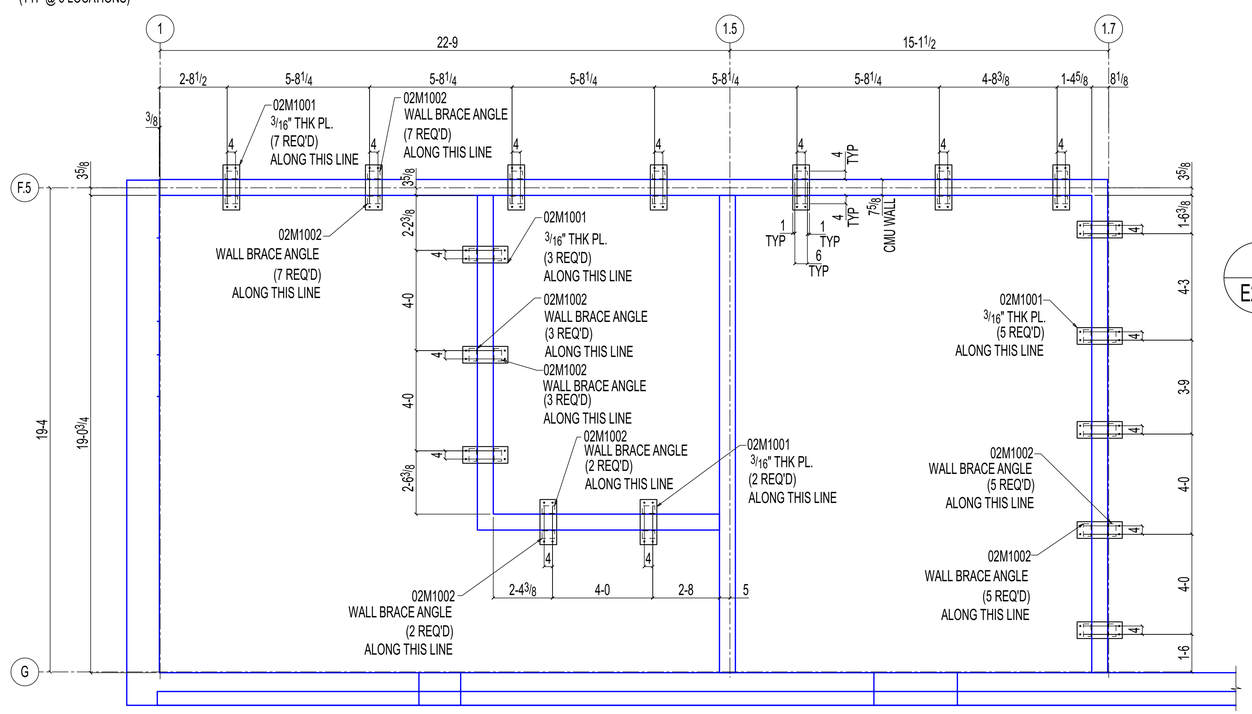

2 / E204 DETAIL

(OTHERS NOT SHOWN FOR CLARITY)

(REF: 1/S102,1/A102)

1. REFERENCED FROM THE FINISHED FLOOR EL: [0'-0"] = DATUM EL: 100'-0" (U.N.O).
2. TOP OF PLATE ELEVATION IS (+15'-8"),U.N.O.
3. ALL ANGLES ARE TO BE L6x4x3/8.(U.N.O).
4. SEE SHEET SE228 FOR CMU WALL BRACING TYPICAL SECTION

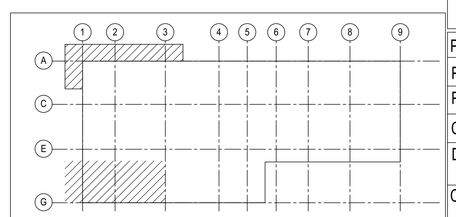

KEY PLAN

REVISIONS

REV#	DWN BY	DESCRIPTION	DATE
A	SRP	ISSUED FOR APPROVAL	Jun 11 2025

THE INFORMATION NOTED HEREON THIS DRAWING IS THE PROPERTY OF STEEL FAB ENTERPRISES, INC. AND SHALL NOTED BE USED WITHOUT WRITTEN CONSENT.

STEEL FAB ENTERPRISES, LLC
AISC CERTIFIED FABRICATOR AND ERECTOR
MISCELLANEOUS METALS FABRICATOR AND ERECTORS
623 BAUMGARDNER ROAD, LANCASTER, PA 17603
TEL. (717)464-0330 FAX (717)464-9464
WWW.STEELFABENTERPRISES.COM

PROJECT OWNER : CK CAPITAL, LLC
PROJECT DESCRIPTION : CLEVELAND BROTHERS-MILESBURG
PROJECT ADDRESS : 1025N. EAGLE VALLEY ROAD, HOWARD, PA 16841
CONTRACTOR : KINSLEY CONSTRUCTION, INC.

DRAWN BY : BAS	DATE : 5-20-25	PROJ. NO. : 25012	REV # A
CHECKED BY : SRP	DATE : 5-20-25	DWG NO. : E204	

DWG DESCRIPTION : CANOPY FRAMING PLAN