EXTERIOR MATERIAL SCHEDULES

| KEYNOTE | DESCRIPTION | MANUFACTURER | PRODUCT | COLOR | FINISH | COMMENTS | Material: GROUP CATEGORY |
|---|---|---|---|---|---|---|---|
| BRICK | | | | | | | |
| BR-01 | WHITE BRICK @ LEVEL 1 | ARRISCRAFT | AVANTI | SEASHELL | | RAKE HORIZONTAL JOINTS, TYP. | BRICK |
| BR-02 | RED BRICK @ BOH & UPPER LEVELS | GLEN-GARY | MIDDLE PLANTATION MODULAR | RED | | RAKE HORIZONTAL JOINTS, TYP. | BRICK |
| BR-03 | BRICK SILL @ WINDOW OPENING | GLEN-GARY | MIDDLE PLANTATION MODULAR | | | | BRICK |
| EQUIPMENT | | | | | | | |
| EQ-01 | FIRE DEPARTMENT CONNECTION | | | | | SEE PLUMBING/FIRE PROTECTION DRAWINGS | EQUIPMENT |
| EQ-02 | GAS METER | | | | | SEE PLUMBING DRAWINGS | EQUIPMENT |
| EQ-03 | PARKING EQUIPMENT | | | | | BY OTHERS | EQUIPMENT |
| FLASHING | | | | | | | |
| FL-01 | CAP FLASHING | | | BLACK (02) | SMOOTH, 70% PVDF | | FLASHING |
| FL-02 | FLASHING | | | BLACK | | | FLASHING |
| GREENROOF | | | | | | | |
| GR-01 | GREEN ROOF - 8" | | | | | 6" INSULATION MIN. | GREENROOF |
| GR-02 | GREEN ROOF - 12" | | | | | 6" INSULATION MIN. | GREENROOF |
| LOUVER | | | | | | | |
| LV-01 | LOUVER @ GARAGE | CS | | BLACK | | | LOUVER |
| LV-03 | LOUVER @ WINDOW | | | | | | LOUVER |
| LV-04 | LOUVER @ GENERATOR | | 156/120 LOUVER | BLACK | | SEE MECHANICAL DRAWINGS | LOUVER |
| LV-05 | LOUVER @ GENERATOR | | 98/120 LOUVER | BLACK | | SEE MECHANICAL DRAWINGS | LOUVER |
| LV-06 | LOUVER @ BOILER ROOM | | 36/18 LOUVER | BLACK | | SEE MECHANICAL DRAWINGS | LOUVER |
| MASONRY UNIT | | | | | | | |
| MU-01 | BASE | ARRISCRAFT | ADAIR MASONRY UNIT | BLUE GREY | FINE DRESSED VEINED | | MASONRY UNIT |
| MU-02 | BALLROOM | ARRISCRAFT | RENNAISSANCE | LIMESTONE | SMOOTH | | MASONRY UNIT |
| MU-03 | SWM FACILITY WALL | ARRISCRAFT | ADAIR TILE | BLUE GREY | FINE DRESSED VEINED | 7-5/8" X 23 - 5/8" LENGTH X 3/4 BED | MASONRY UNIT |
| METAL PANEL | | | | | | | |
| MP-01 | VERTICAL METAL PANEL | ATAS | VERSA-LINE , VSN120 | BLACK (02) | SMOOTH, 70% PVDF | 0.040 ALUMINUM | METAL PANEL |
| MP-02 | ROOFTOP MECHANICAL ENCLOSURE | ATAS | BELVEDERE PENUMWALL, BWS391 | TITANIUM (35) | 70% PVDF | PERFORATED - A25, 3/8" HOLES 9/16" STAGGERED CENTERS, 40% OPEN AREA | METAL PANEL |
| MP-03 | METAL SCREEN @ RESTAURANT | CUSTOM | - | PATINA GREEN (12) | FLUOROPOLYMER (PVDF) | CUSTOM PERFORATIONS, ATTACHMENT TO CURTAINWALL SYSTEM | METAL PANEL |
| MP-04 | SOFFIT | ATAS | OPALINE OPF080 (0.40) | BLACK (02) | 70% PVDF | SOFFIT AT GUESTROOM BAYS, ENTRY DRIVE | METAL PANEL |
| MORTAR | | | | | | | |
| MR-01 | MORTAR @ BR-01, MU-01, MU-02, & MU-03 | WORKRITE | WR-103 | ARTIC WHITE | | | MORTAR |
| MR-02 | MORTAR @ BR-02 | ARDEX | CANYON PALETTE | BAKED TERRA COTTA 32 | | | MORTAR |
| PAVER | | | | | | | |
| PV-01 | CONCRETE ROOF PAVER | | | | | REFER TO LANDSCAPE | PAVER |
| PV-02 | GRAVEL BALLAST | | | | | REFER TO LANDSCAPE | PAVER |
| PV-03 | ROOF MAINTENANCE PAVER | | | | | REFER TO LANDSCAPE | PAVER |
| PRECAST | | | | | | | |
| PR-01 | PRECAST PANEL | CUSTOM | | LIMESTONE | | | PRECAST |
| RAILING | | | | | | | |
| RL-01 | METAIL RAILING - GROUND LEVEL | | | BLACK | | | RAILING |
| RL-03 | GLASS RAILING | CRL | CRL | CLEAR GLAZING | MILL SHOE BASE | | RAILING |
| SIGNAGE | | | | | | | |
| SG-01 | - | | | | | SIGNAGE TO BE PERMITTED SEPARATELY | SIGNAGE |
| SG-03 | TBD | | | | | SIGNAGE TO BE PERMITTED SEPARATELY | SIGNAGE |
| SG-05 | TBD | | | | | SIGNAGE TO BE PERMITTED SEPARATELY | SIGNAGE |
| SPECIALTY | | | | | | | |
| SP-03 | METAL & GLASS CANOPY | | | BLACK | | | SPECIALTY |
| SP-04 | KNOX BOX | KNOXBOX | 3200 MODEL: KLS-3263 | ALUMINUM/BLACK | | RECESSED,INSTALL ALUMINUM AT WHITE BRICK LOCATIONS, INSTALL BLACK AT METAL PANEL LOCATION AND RED BRICK | SPECIALTY |
| SP-05 | FLAG POLE AND BRACKET | FLAGS.COM | MODEL ECOM 14 | BLACK | | | SPECIALTY |
| SP-07 | BALCONY SCREEN DIVIDER | | | | | REFER TO LANDSCAPE | SPECIALTY |
| SP-08 | GLASS VESTIBULE | | | | | | SPECIALTY |
| SP-09 | ROOF LADDER | O'KEEFE'S INC. (BOD) | 503A ACCESS LADDER | BLACK | POWDERCOATED | BALLROOM ROOF AND PENTHOUSE ROOF | SPECIALTY |
| SP-10 | METAL CANOPY | | | BLACK | | | SPECIALTY |
| SP-11 | ROOF ANCHOR | PRO-BEL | | | | SEE SHEET A0127 | SPECIALTY |
| SP-12 | BOLLARD 1 | RELIANCE FOUNDRY | R-8915 | SS.316 | SATIN SURFACE BUFFED #06 | FIXED EMBEDDED MOUNT | SPECIALTY |
| SP-13 | BOLLARD 2 | RELIANCE FOUNDRY | R-7902 | YELLOW | POWDERCOATED | FIXED MOUNTING | SPECIALTY |
| SP-14 | BOLLARD 3 | RELIANCE FOUNDRY | R-7902 | BLACK | POWDERCOATED | REMOVABLE MOUNTING | SPECIALTY |

## Bollard Post, Model R-7902

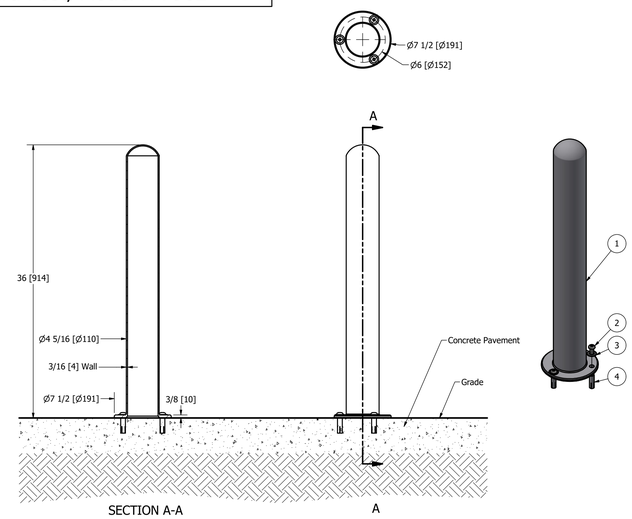


Flanged / Surface Mount

### General Description:

Make a pronounced statement on entry to your streetscape, business, park, school or stadium with the contemporary and practical design of the model R-7902 steel bollard. A staple of the product line, it will complement the aesthetics of almost any architectural style. It can be embedded in new concrete or surface-mounted on existing concrete. For locations where access needs fluctuate, it can also be installed with removable or fold down mountings. The model R-7902 can be finished in one of seven different powder-coated color options and it is kept in stock, available to ship immediately.

For more information on bollard post installation, please visit: www.reliance-foundry.com/bollard/installation-bollards

### Specifications:

Height Above Grade: 36" [914]

Diameter: 4 5/16" [110]

Weight: 31 lbs [14kg] ( Bollard Post Full Length )

Material: Steel ( ASTM A36 )

Finish Options:
- ✓ Polyester Powdercoated
  See Reliance Foundry's standard color options at www.reliance-foundry.com/bollard/colors-bollards

### Mount Options:

- ○ Removable Receiver with Lid (see sheet 2 of 8)
- ○ Removable Receiver with Chain (see sheet 3 of 8)
- ○ Fixed Embedded Mount (see sheet 4 of 8)
- ✓ Flanged Surface Mount (see sheet 5 of 8)
- ○ Fold Down Mount (see sheet 6 of 8)
- ○ Removable Shallow Mount (see sheet 7 of 8)
- ○ Optional Chain Accessory (see sheet 8 of 8)

Buy a Bollard Plant a Tree

Notes:

- Embedment details are for reference illustration only. Minimum foundation sizes depend on local soil conditions, weather conditions, and engineering requirements.
- Bollard post is provided as shown, with material detailed in legend below. Concrete, foundation and/or installation ordered separately or provided by others.
- This drawing is not drawn to scale. Dimensions provided herein is for reference only. Please consult Reliance Foundry sales professionals if any dimension is critical to your particular installation.
- Reliance Foundry reserves the right to amend design and specifications without prior notice for product improvement.

PARTS LIST

| ITEM | QTY | PART NUMBER | DESCRIPTION | MATERIAL | WEIGHT. |
|---|---|---|---|---|---|
| 1 | 1 | R7902 | Flanged Bollard | R7902 Flanged Bollard Body | Steel Powder Coated | 30 lbs |
| 2 | 3 | Button Head Bolt 1/2" x 1 1/4" | Hexagon Socket Button Head Cap Bolt 1/2" x 1 1/4" - requires 5/16" hex key | Stainless Steel | 1/8 lbs |
| 3 | 3 | Stainless Steel Washer 1/2" | Stainless Steel Washer 1/2" OD 1 1/4" Thick .05" | Stainless Steel | - |
| 4 | 3 | Drop-in Concrete Insert 1/2" | Drop-in Concrete Insert 1/2" - requires 5/8" x 2" hole (dia. x depth) | Steel Plated | 1/8 lbs |

COPYRIGHT RESERVED THIS PLAN DRAWING AND DESIGN ARE, AND AT ALL TIMES REMAIN, THE EXCLUSIVE PROPERTY OF RELIANCE FOUNDRY CO. LTD.

SNAP#1 FROM RELIANCE FOUNDRY PRODUCT DETAILS

RELIANCE FOUNDRY SINCE 1925
Unit 207, 6450 - 148 Street, Surrey, BC V3S 7G7, Canada
1-888-735-5680 info@reliance-foundry.com
www.reliance-foundry.com

TITLE: Bollard Post, Model R-7902

SIZE: C | DWG NO: R-7902_Public | REV: A04

UNLESS OTHERWISE SPECIFIED: NOT TO SCALE | DIMS ARE IN INCHES [MILLIMETERS] | SHEET 5 OF 8

Q1

We intend to follow the SNAP#1 bollard product details for the cyan-highlighted steel pipe bollard (SOW14), and all bollards are considered "**BUY OUT**" items and we will provide field use drawings. Please confirm.

FILLAT + ARCHITECTURE
400 E. PRATT | SUITE 502 | BALTIMORE MD | 21202
Ph: 410.576.9310 | PFARC.COM

STRUCTURAL ENGINEER
TADJER-COHEN-EDELSON ASSOCIATES ,INC.
1109 SILVER SPRING ST., SUITE 510
SILVER SPRING, MD 20910
(301) 587-1820

MEP ENGINEER
ALLEN & SHARIFF ENGINEERING, LLC
7061 DEEPAGE DRIVE
COLUMBIA, MD 21045
(443) 545-7100

CIVIL ENGINEER
BOHLER
901 DULANEY VALLEY ROAD, SUITE 801
TOWSON, MD 21204
(410) 821-7900

INTERIOR DESIGNER
LOONEY & ASSOCIATES
20 N WACKER DR. SUITE 2010
CHICAGO, ILLINOIS 60606
(312) 329-0464

LANDSCAPE
EDSA
400 E. PRATT STREET, SUITE 502
BALTIMORE, MARYLAND 21202
(443)539-3350

TECHNOLOGY
MICHAEL RAISER ASSOCIATES, INC.
500 VALLEY ROAD SUITE 106
WAYNE, NJ 07470
(973)305-0011

# FREDERICK CONFERENCE CENTER HOTEL
20 SOUTH CARROLL STREET
FREDERICK, MARYLAND, 21701

© Copyright 2024 - Fillat Architecture, Inc. All rights reserved

IFC SET

EXTERIOR FINISH SCHEDULE

PROJECT NO.: 13013
SCALE:
DATE: 12.19.2025
REVISIONS

A0911

SK#03
02 pages
02-Queries
Date: 01-09-2026

12/19/2025 10:30:02 PM

EXTERIOR MATERIAL SCHEDULES

| KEYNOTE | DESCRIPTION | MANUFACTURER | PRODUCT | COLOR | FINISH | COMMENTS | Material: GROUP CATEGORY |
|---|---|---|---|---|---|---|---|
| BRICK | | | | | | | |
| BR-01 | WHITE BRICK @ LEVEL 1 | ARRISCRAFT | AVANTI | SEASHELL | | RAKE HORIZONTAL JOINTS, TYP. | BRICK |
| BR-02 | RED BRICK @ BOH & UPPER LEVELS | GLEN-GARY | MIDDLE PLANTATION MODULAR | RED | | RAKE HORIZONTAL JOINTS, TYP. | BRICK |
| BR-03 | BRICK SILL @ WINDOW OPENING | GLEN-GARY | MIDDLE PLANTATION MODULAR | | | | BRICK |
| EQUIPMENT | | | | | | | |
| EQ-01 | FIRE DEPARTMENT CONNECTION | | | | | SEE PLUMBING/FIRE PROTECTION DRAWINGS | EQUIPMENT |
| EQ-02 | GAS METER | | | | | SEE PLUMBING DRAWINGS | EQUIPMENT |
| EQ-03 | PARKING EQUIPMENT | | | | | BY OTHERS | EQUIPMENT |
| FLASHING | | | | | | | |
| FL-01 | CAP FLASHING | | | BLACK (02) | SMOOTH, 70% PVDF | | FLASHING |
| FL-02 | FLASHING | | | BLACK | | | FLASHING |
| GREENROOF | | | | | | | |
| GR-01 | GREEN ROOF - 8" | | | | | 6" INSULATION MIN. | GREENROOF |
| GR-02 | GREEN ROOF - 12" | | | | | 6" INSULATION MIN. | GREENROOF |
| LOUVER | | | | | | | |
| LV-01 | LOUVER @ GARAGE | CS | | BLACK | | | LOUVER |
| LV-03 | LOUVER @ WINDOW | | | | | | LOUVER |
| LV-04 | LOUVER @ GENERATOR | | 156/120 LOUVER | BLACK | | SEE MECHANICAL DRAWINGS | LOUVER |
| LV-05 | LOUVER @ GENERATOR | | 98/120 LOUVER | BLACK | | SEE MECHANICAL DRAWINGS | LOUVER |
| LV-06 | LOUVER @ BOILER ROOM | | 36/18 LOUVER | BLACK | | SEE MECHANICAL DRAWINGS | LOUVER |
| MASONRY UNIT | | | | | | | |
| MU-01 | BASE | ARRISCRAFT | ADAIR MASONRY UNIT | BLUE GREY | FINE DRESSED VEINED | | MASONRY UNIT |
| MU-02 | BALLROOM | ARRISCRAFT | RENNAISSANCE | LIMESTONE | SMOOTH | | MASONRY UNIT |
| MU-03 | SWM FACILITY WALL | ARRISCRAFT | ADAIR TILE | BLUE GREY | FINE DRESSED VEINED | 7-5/8" X 23 - 5/8" LENGTH X 3/4 BED | MASONRY UNIT |
| METAL PANEL | | | | | | | |
| MP-01 | VERTICAL METAL PANEL | ATAS | VERSA-LINE , VSN120 | BLACK (02) | SMOOTH, 70% PVDF | 0.040 ALUMINUM | METAL PANEL |
| MP-02 | ROOFTOP MECHANICAL ENCLOSURE | ATAS | BELVEDERE PENUMWALL, BWS391 | TITANIUM (35) | 70% PVDF | PERFORATED - A25, 3/8" HOLES 9/16" STAGGERED CENTERS, 40% OPEN AREA | METAL PANEL |
| MP-03 | METAL SCREEN @ RESTAURANT | CUSTOM | - | PATINA GREEN (12) | FLUOROPOLYMER (PVDF) | CUSTOM PERFORATIONS, ATTACHMENT TO CURTAINWALL SYSTEM | METAL PANEL |
| MP-04 | SOFFIT | ATAS | OPALINE OPF080 (0.40) | BLACK (02) | 70% PVDF | SOFFIT AT GUESTROOM BAYS, ENTRY DRIVE | METAL PANEL |
| MORTAR | | | | | | | |
| MR-01 | MORTAR @ BR-01, MU-01, MU-02, & MU-03 | WORKRITE | WR-103 | ARTIC WHITE | | | MORTAR |
| MR-02 | MORTAR @ BR-02 | ARDEX | CANYON PALETTE | BAKED TERRA COTTA 32 | | | MORTAR |
| PAVER | | | | | | | |
| PV-01 | CONCRETE ROOF PAVER | | | | | REFER TO LANDSCAPE | PAVER |
| PV-02 | GRAVEL BALLAST | | | | | REFER TO LANDSCAPE | PAVER |
| PV-03 | ROOF MAINTENANCE PAVER | | | | | REFER TO LANDSCAPE | PAVER |
| PRECAST | | | | | | | |
| PR-01 | PRECAST PANEL | CUSTOM | | LIMESTONE | | | PRECAST |
| RAILING | | | | | | | |
| RL-01 | METAIL RAILING - GROUND LEVEL | | | BLACK | | | RAILING |
| RL-03 | GLASS RAILING | CRL | CRL | CLEAR GLAZING | MILL SHOE BASE | | RAILING |
| SIGNAGE | | | | | | | |
| SG-01 | - | | | | | SIGNAGE TO BE PERMITTED SEPARATELY | SIGNAGE |
| SG-03 | TBD | | | | | SIGNAGE TO BE PERMITTED SEPARATELY | SIGNAGE |
| SG-05 | TBD | | | | | SIGNAGE TO BE PERMITTED SEPARATELY | SIGNAGE |
| SPECIALTY | | | | | | | |
| SP-03 | METAL & GLASS CANOPY | | | BLACK | | | SPECIALTY |
| SP-04 | KNOX BOX | KNOXBOX | 3200 MODEL: KLS-3263 | ALUMINUM/BLACK | | RECESSED,INSTALL ALUMINUM AT WHITE BRICK LOCATIONS, INSTALL BLACK AT METAL PANEL LOCATION AND RED BRICK | SPECIALTY |
| SP-05 | FLAG POLE AND BRACKET | FLAGS.COM | MODEL ECOM 14 | BLACK | | | SPECIALTY |
| SP-07 | BALCONY SCREEN DIVIDER | | | | | REFER TO LANDSCAPE | SPECIALTY |
| SP-08 | GLASS VESTIBULE | | | | | | SPECIALTY |
| SP-09 | ROOF LADDER | O'KEEFE'S INC. (BOD) | 503A ACCESS LADDER | BLACK | POWDERCOATED | BALLROOM ROOF AND PENTHOUSE ROOF | SPECIALTY |
| SP-10 | METAL CANOPY | | | BLACK | | | SPECIALTY |
| SP-11 | ROOF ANCHOR | PRO-BEL | | | | SEE SHEET A0127 | SPECIALTY |
| SP-12 | BOLLARD 1 | RELIANCE FOUNDRY | R-8915 | SS.316 | SATIN SURFACE BUFFED #06 | FIXED EMBEDDED MOUNT | SPECIALTY |
| SP-13 | BOLLARD 2 | RELIANCE FOUNDRY | R-7902 | YELLOW | POWDERCOATED | FIXED MOUNTING | SPECIALTY |
| SP-14 | BOLLARD 3 | RELIANCE FOUNDRY | R-7902 | BLACK | POWDERCOATED | REMOVABLE MOUNTING | SPECIALTY |

Q2

We intend to follow SNAP#2 bollard details for the yellow highlighted steel pipe bollard(SOW14) and all bollards are considered "BUY OUT" items and we will provide field use drawings.
Please confirm.

## Bollard Post, Model R-8915

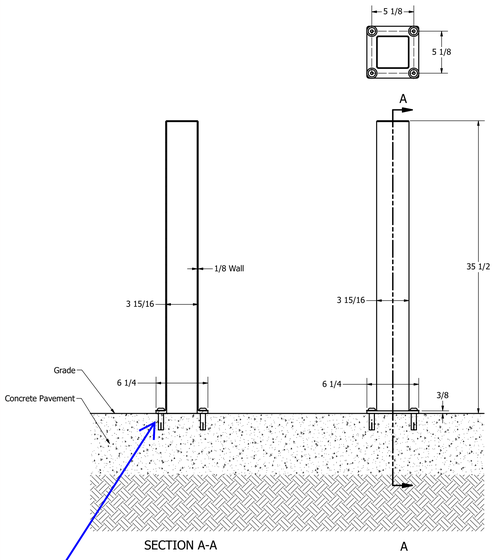


SECTION A-A




Flanged / Surface Mount

### General Description:

The R-8915 decorative stainless steel bollard has a square design, efficiently utilizing surface space while offering security for both urban and industrial settings. Stainless steel has high visibility and stands strong against corrosive outdoor weather. Installation options include flanged and embedded mounting systems.

For more information on bollard post installation, please visit: www.reliance-foundry.com/bollard/installation-bollards

### Specifications:

Height: 36" ( Above Grade ) Standard
35 1/2" ( Above Grade ) Flanged

Post Profile Dimension: 3 15/16" x 3 15/16" Square
[100mm x 100mm Square]

Weight: 23 lbs ( Bollard Post Full Length )

Material: Stainless Steel 316

Finish Options:

- ⦿ Satin Surface Finish Buffed No. 6
- ○ Polyester Powder Coated ( Optional )

See Reliance Foundry's standard color options at www.reliance-foundry.com/bollard/colors-bollards

### Mount Options:

- ○ Fixed Embedded Mount (see sheet 2 of 3)
- ✓ Flanged Surface Mount (see sheet 3 of 3)

Buy a Bollard Plant a Tree

Notes:

- Embedment details are for reference illustration only. Minimum foundation sizes depend on local soil conditions, weather conditions, and engineering requirements.
- Bollard post is provided as shown, with material detailed in legend below. Concrete, foundation and/or installation ordered separately or provided by others.
- This drawing is not drawn to scale. Dimensions provided herein is for reference only. Please consult Reliance Foundry sales professionals if any dimension is critical to your particular installation.
- Reliance Foundry reserves the right to amend design and specifications without prior notice for product improvement.

PARTS LIST

| ITEM | QTY | PART NUMBER | DESCRIPTION |
|---|---|---|---|
| 1 | 1 | R8915 Flanged Bollard Body | R8915 Flanged Bollard Body |
| 2 | 4 | Drop-in Concrete Insert 1/2" | Drop-in Concrete Insert 1/2" - requires 5/8" x 2" hole (dia. x depth) |
| 3 | 4 | Stainless Steel Washer 1/2" | Stainless Steel Washer 1/2" OD 1 1/4" Thick. 05" |
| 4 | 4 | Button Head Bolt 1/2" x 1 1/4" | Hexagon Socket Button Head Cap Bolt 1/2" x 1 1/4" - requires 5/16" hex key |

COPYRIGHT RESERVED THIS PLAN DRAWING AND DESIGN ARE, AND AT ALL TIMES REMAIN, THE EXCLUSIVE PROPERTY OF RELIANCE FOUNDRY CO. LTD.

SNAP#2 FROM RELIANCE FOUNDRY PRODUCT DETAILS

RELIANCE FOUNDRY SINCE 1925
Unit 207, 6450 - 148 Street, Surrey, BC V3S 7G7, Canada
1-877-789-3245 info@reliance-foundry.com
www.reliance-foundry.com

TITLE: Bollard Post, Model R-8915

SIZE C | DWG NO R-8915 | REV A02

NOT TO SCALE | SHEET 3 OF 3

FILLAT+ ARCHITECTURE
400 E. PRATT | SUITE 502 | BALTIMORE MD | 21202
Ph: 410.576.9310 | PFARC.COM

STRUCTURAL ENGINEER
TADJER-COHEN-EDELSON ASSOCIATES ,INC.
1109 SILVER SPRING ST., SUITE 510
SILVER SPRING, MD 20910
(301) 587-1820

MEP ENGINEER
ALLEN & SHARIFF ENGINEERING, LLC
7061 DEEPAGE DRIVE
COLUMBIA, MD 21045
(443) 545-7100

CIVIL ENGINEER
BOHLER
901 DULANEY VALLEY ROAD, SUITE 801
TOWSON, MD 21204
(410) 821-7900

INTERIOR DESIGNER
LOONEY & ASSOCIATES
20 N WACKER DR. SUITE 2010
CHICAGO, ILLINOIS 60606
(312) 329-0464

LANDSCAPE
EDSA
400 E. PRATT STREET, SUITE 502
BALTIMORE, MARYLAND 21202
(443)539-3350

TECHNOLOGY
MICHAEL RAISER ASSOCIATES, INC.
500 VALLEY ROAD SUITE 106
WAYNE, NJ 07470
(973)305-0011

# FREDERICK CONFERENCE CENTER HOTEL

20 SOUTH CARROLL STREET
FREDERICK, MARYLAND, 21701

© Copyright 2025 | Fillat Architecture, Inc. All rights reserved.

IFC SET

EXTERIOR FINISH SCHEDULE

PROJECT NO.: 13013
SCALE:
DATE: 12.19.2025
REVISIONS

A0911

12/19/2025 10:30:02 PM