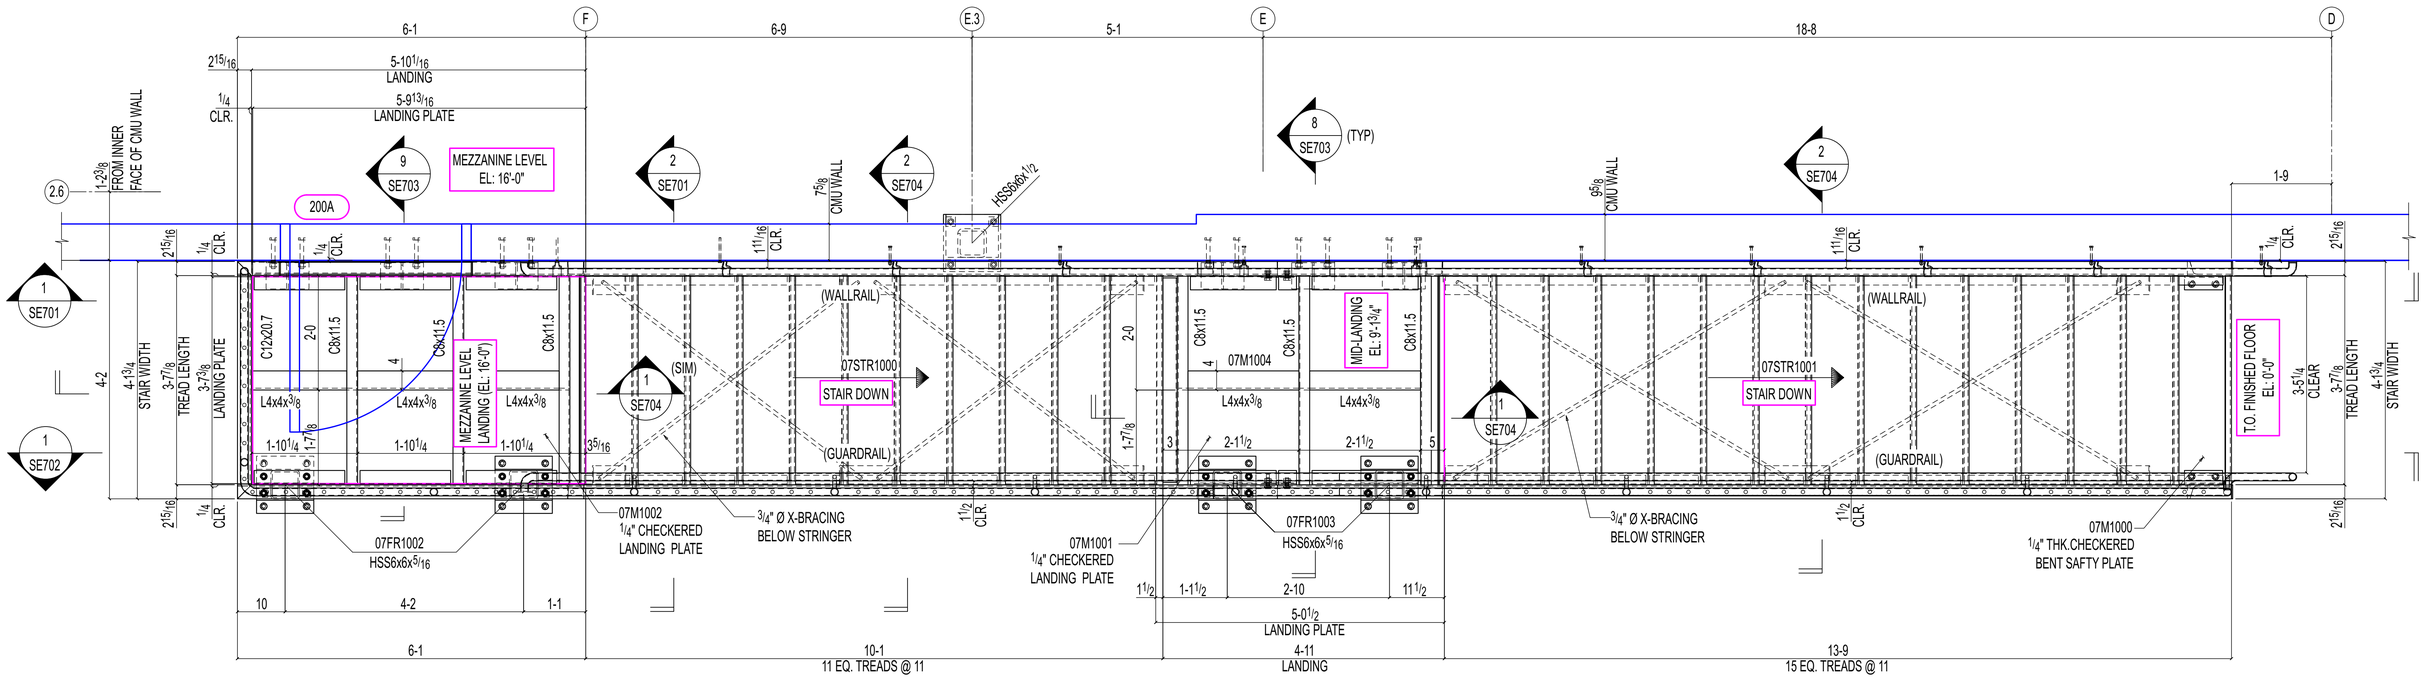

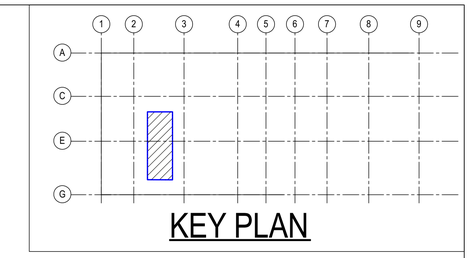

1 / E701 ENLARGED STAIR FRAMING PLAN

(REF: 1/A102,1/A380)

NOTE:
1.TOP OF SLAB REFERENCED FROM THE FINISHED FLOOR EL: [0'-0"] = DATUM EL: 100'-0" (U.N.O).
2. ALL BOLTS ARE 3/4" Ø A1852N BOLTS (U.N.O)
3. ALL BOLTS ARE TO BE SNUG TIGHTENING (U.N.O)
4. ALL GUARDRAILS SHOULD BE ON CENTRE OF STRINGER (U.N.O)

TRUE NORTH

PROJECT NORTH

DESCRIPTION	SECTION SIZE
STAIR STRINGER	C12x20.7
GUARDRAIL	PIPE 1 1/4 SCH40
HANDRAIL	PIPE 1 1/4 SCH40
GUARDRAIL POST	PIPE 1 1/4 SCH80
WALL RAIL	PIPE 1 1/4 SCH40
PICKETS	3/4" ROUND BAR

REVISIONS

REV#	DWN BY	DESCRIPTION	DATE
A	SRP	ISSUED FOR APPROVAL	Jun 16 2025

THE INFORMATION NOTED HEREON THIS DRAWING IS THE PROPERTY OF STEEL FAB ENTERPRISES, INC. AND SHALL NOTED BE USED WITHOUT WRITTEN CONSENT.

STEEL FAB
ENTERPRISES, LLC
AISC CERTIFIED FABRICATOR AND ERECTOR
MISCELLANEOUS METALS FABRICATOR AND ERECTORS
623 BAUMGARDNER ROAD, LANCASTER, PA 17603
TEL. (717)464-0330 FAX (717)464-9464
WWW.STEELFABENTERPRISES.COM

PROJECT OWNER : CK CAPITAL, LLC

PROJECT DESCRIPTION : CLEVELAND BROTHERS-MILESBURG

PROJECT ADDRESS : 1025N. EAGLE VALLEY ROAD, HOWARD, PA 16841

CONTRACTOR : KINSLEY CONSTRUCTION, INC.

DRAWN BY : BAS	DATE : 5-20-25	PROJ. NO. :	25012	REV # A
CHECKED BY : SRP	DATE : 5-20-25	DWG NO. :	E701	

DWG DESCRIPTION : ENLARGED STAIR FRAMING PLAN